

addendum

4

Draper Prison Vocational Training Center

Draper Utah

ajc architects project #: 0502 dfcm project #: 04256100

date:

Thursday, May 12, 2005

time:

2:27 PM

pages:

11 Total

The bidders on the above captioned project shall be governed by the following changes, additions, and/or deletions in the Drawings and Specifications. This Addendum shall be included as part of the Contract Documents.

Items

Item 1: Specification section 08331 has been revised to include counter doors and is included herein in it's entirety. Finish and construction of counter doors to be *galvanized steel*.

Item 2: Specification section 13125 to include the following amendments:

- a. Section 1.4.B.1: To read "*Rigid Modular: Solid-member, structural-framing system with Interior columns."* In lieu of "Rigid Clear Span: Solid-member, structural-framing system without interior columns".
- b. Section 1.5.D.1.a: To read "R-Value: R-38." In lieu of "R-Value: R-30".
- c. Section 2.9.A.4: To read "Panel Coverage: 18 Inches (457 mm)." In lieu of "Panel Coverage: 16 inches (406 mm).
- Item 3: Millwork in Rest Rooms #111 and #112 to have plastic laminate counter tops (reference detail A5 sheet AE502).
- Item 4: See attached revised sheet AS102 for extent of new concrete paving and waterway. Sheet AS102 has been revised to match Civil Drawings as issued in Addendum #1 dated May 3, 2005.
- Item 5: One hour rated wall at grid line A as detailed in Addenda #1 to be constructed *Inside of concrete foundation wall and girts* and not on top of foundation wall as indicated in drawing AD1.1 of Addendum #1 dated May 3, 2005. Wall to be constructed in accordance with UL Design V432 as issued in Addendum #1 dated May 3, 2005.

Item 6: R-Value of exterior wall insulation to be *R-19* and not R-38 as indicated in drawing AD1.1 of Addendum #1 dated May 3, 2005.

Item 7: See attached Mechanical Addendum.

END OF ADDENDUM

Brad Ashworth AIA

attachments:

Specification Section 08331 and revised sheet AS102

SECTION 08331 - OVERHEAD COILING DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following types of electric-motor-operated overhead coiling doors:
 - Insulated service doors.
 - 2. Fire-rated service doors.
 - 3. Counter doors and shutters.
- B. Related Sections include the following:
 - 1. Division 5 Section "Metal Fabrications" for miscellaneous steel supports.
 - 2. Division 8 Section "Door Hardware" for lock cylinders and keying.
 - 3. Division 13 Section "Metal Building Systems" for metal frames at exterior openings.
 - 4. Division 16 Sections for electrical service and connections for powered operators and accessories.

1.3 DEFINITIONS

A. Operation Cycle: One cycle of a door is complete when it is moved from the closed position to the fully open position and returned to the closed position.

1.4 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide overhead coiling doors capable of withstanding the effects of gravity loads and the following loads and stresses without evidencing permanent deformation of door components:
 - 1. Wind Load: Uniform pressure (velocity pressure) of 20 lbf/sq. ft. (960 Pa), acting inward and outward.
 - 2. Impact Test for Flying Debris: Comply with ASTM E 1996, tested according to ASTM E 1886.
 - a. Level of Protection: Basic Protection.
 - b. Wind Zone Exposure C: 90 mph (144 km/h), pressure test to 1/2 and 1-1/2 x design pressure (positive and negative).
- B. Operation-Cycle Requirements: Provide overhead coiling door components and operators capable of operating for not less than 10,000 cycles and for 10 cycles per day.

1. Include tamperproof cycle counter.

1.5 SUBMITTALS

- A. Product Data: For each type and size of overhead coiling door and accessory. Include the following:
 - 1. Summary of forces and loads on walls and jambs.
 - 2. Fire-Rated Doors: Include description of fire-release system including testing and resetting instructions.
- B. Shop Drawings: For special components and installations not dimensioned or detailed in manufacturer's product data.
- C. Qualification Data: For Installer.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for both installation and maintenance of units required for this Project.
- B. Source Limitations: Obtain overhead coiling doors through one source from a single manufacturer.
 - 1. Obtain operators and controls from overhead coiling door manufacturer.
- C. Fire-Test-Response Characteristics: Provide assemblies complying with NFPA 80 that are identical to door and frame assemblies tested for fire-test-response characteristics per UL 10b and NFPA 252, and that are listed and labeled for fire ratings indicated by UL, FMG, ITS, or another testing and inspecting agency acceptable to authorities having jurisdiction.
- D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturer: Subject to compliance with requirements, provide products by one of the following:
 - 1. Alpine Overhead Doors, Inc.
 - 2. Atlas Door; Div. of Clopay Building Products Company, Inc.
 - 3. Cookson Company.
 - 4. Cornell Iron Works Inc.
 - 5. Dynamic Closures Corporation.
 - 6. Mahon Door Corporation.
 - 7. McKeon Rolling Steel Door Company, Inc.
 - 8. Metro Door.

- 9. Overhead Door Corp.
- 10. Pacific Rolling Doors Co.
- 11. Raynor.
- 12. Southwestern Steel Rolling Door Co.
- 13. Wayne-Dalton Corp.
- 14. Windsor Door, a MAGNATRAX Corporation.

2.2 DOOR CURTAIN MATERIALS AND CONSTRUCTION

- A. Door Curtains: Fabricate overhead coiling door curtain of interlocking slats, designed to withstand wind loading indicated, in a continuous length for width of door without splices. Unless otherwise indicated, provide slats of thickness and mechanical properties recommended by door manufacturer for performance, size, and type of door indicated, and as follows:
 - 1. Steel Door Curtain Slats: Zinc-coated (galvanized), cold-rolled structural steel (SS) sheet; complying with ASTM A 653/A 653M, G90 (Z275) coating designation.
 - a. Minimum Base-Metal (Uncoated) Thickness: 0.0209 inch (0.55 mm).
 - b. Flat profile slats.
 - 2. Insulation: Fill slat with manufacturer's standard rigid cellular polystyrene or polyurethane-foam-type thermal insulation complying with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, according to ASTM E 84. Enclose insulation completely within metal slat faces.
 - 3. Inside Curtain Slat Face: To match material of outside metal curtain slat.
- B. Endlocks and Windlocks for Service Doors: Malleable-iron casings galvanized after fabrication, secured to curtain slats with galvanized rivets or high-strength nylon. Provide locks on not less than alternate curtain slats for curtain alignment and resistance against lateral movement.
- C. Bottom Bar for Service Doors: Consisting of 2 angles, each not less than 1-1/2 by 1-1/2 by 1/8 inch (38 by 38 by 3 mm) thick; galvanized, stainless-steel, or aluminum extrusions to suit type of curtain slats.
- D. Curtain Jamb Guides for Service Doors: Fabricate curtain jamb guides of steel angles or channels and angles, with sufficient depth and strength to retain curtain, to allow curtain to operate smoothly, and to withstand loading. Build up units with not less than 3/16-inch- (5-mm-) thick galvanized steel sections complying with ASTM A 36/A 36/M and ASTM A 123/A 123M. Slot bolt holes for guide adjustment. Provide removable stops on guides to prevent overtravel of curtain, and a continuous bar for holding windlocks.

2.3 HOODS AND ACCESSORIES

A. Hood: Form to act as weatherseal and entirely enclose coiled curtain and operating mechanism at opening head. Contour to fit end brackets to which hood is attached. Roll and reinforce top and bottom edges for stiffness. Provide closed ends for surface-mounted hoods and provide fascia for any portion of between-jamb mounting projecting beyond wall face. Provide intermediate support brackets as required to prevent sagaina.

- 1. Fabricate hoods for steel doors of minimum 0.028-inch- (0.7-mm-) thick, hot-dip galvanized steel sheet with G90 (Z275) zinc coating, complying with ASTM A 653/A 653M.
- 2. Shape: Round.
- B. Integral Sills: Fabricate sills as integral part of frame assembly of same sheet metal; 0.078-inch (2.0-mm) minimum thickness.
- C. Weatherseals: Provide replaceable, adjustable, continuous, compressible weather-stripping gaskets fitted to bottom and top of exterior doors, unless otherwise indicated. At door head, use 1/8-inch- (3-mm-) thick, replaceable, continuous sheet secured to inside of hood.
 - 1. Provide motor-operated doors with combination bottom weatherseal and sensor edge.
 - 2. In addition, provide replaceable, adjustable, continuous, flexible, 1/8-inch- (3-mm-) thick seals of flexible vinyl, rubber, or neoprene at door jambs for a weathertight installation.
- D. Smoke Seals: Provide UL-listed and -tested smoke-seal perimeter gaskets.
- E. Push/Pull Handles: For push-up-operated or emergency-operated doors, provide galvanized steel lifting handles on each side of door.
 - 1. Provide pull-down straps or pole hooks for doors more than 84 inches (2130 mm) high.
- F. Fabricate locking device assembly with lock, spring-loaded dead bolt, operating handle, cam plate, and adjustable locking bar to engage through slots in tracks.
 - 1. Locking Bars: Full-disc cremone type, both jamb sides operable from inside only.
 - 2. Lock cylinder is specified in Division 8 Section "Door Hardware."
- G. If door unit is power operated, provide safety interlock switch to disengage power supply when door is locked.
- H. Provide automatic-closing device that is inoperative during normal door operations, with [oscillating] [viscous-speed] governor unit complying with requirements of NFPA 80 and with an easily tested and reset release mechanism, and designed to be activated by the following:
 - 1. Replaceable fusible links with temperature rise and melting point of 165 deg F (74 deg C); interconnected and mounted on both sides of door opening.
 - Manufacturer's standard UL-labeled smoke detector and door-holder-release devices.
 - 3. Manufacturer's standard UL-labeled heat detector and door-holder-release devices.
 - 4. Building fire alarm and detection system and door-holder-release devices.

2.4 COUNTERBALANCING MECHANISM

- A. General: Counterbalance doors by means of adjustable-tension, steel helical torsion spring mounted around a steel shaft and contained in a spring barrel connected to door curtain with barrel rings. Use grease-sealed bearings or self-lubricating graphite bearings for rotating members.
- B. Counterbalance Barrel: Fabricate spring barrel of hot-formed, structural-quality, welded or seamless carbon-steel pipe, of sufficient diameter and wall thickness to support rolled-up

- curtain without distortion of slats and to limit barrel deflection to not more than 0.03 in./ft. (2.5 mm/m) of span under full load.
- C. Provide spring balance of one or more oil-tempered, heat-treated steel helical torsion springs. Size springs to counterbalance weight of curtain, with uniform adjustment accessible from outside barrel. Provide cast-steel barrel plugs to secure ends of springs to barrel and shaft.
- D. Fabricate torsion rod for counterbalance shaft of cold-rolled steel, sized to hold fixed spring ends and carry torsional load.
- E. Brackets: Provide mounting brackets of manufacturer's standard design, either cast iron or cold-rolled steel plate.

2.5 ELECTRIC DOOR OPERATORS

- A. General: Provide electric door operator assembly of size and capacity recommended and provided by door manufacturer for door and operation-cycle requirements specified, with electric motor and factory-prewired motor controls, starter, gear-reduction unit, solenoid-operated brake, clutch, remote-control stations, control devices, integral gearing for locking door, and accessories required for proper operation.
- B. Comply with NFPA 70.
- C. Disconnect Device: Provide hand-operated disconnect or mechanism for automatically engaging chain and sprocket operator and releasing brake for emergency manual operation while disconnecting motor without affecting timing of limit switch. Mount disconnect and operator so they are accessible from floor level. Include interlock device to automatically prevent motor from operating when emergency operator is engaged.
- D. Design operator so motor may be removed without disturbing limit-switch adjustment and without affecting emergency auxiliary operator.
- E. Provide control equipment complying with NEMA ICS 1, NEMA ICS 2, and NEMA ICS 6, with NFPA 70 Class 2 control circuit, maximum 24-V, ac or dc.
- F. Door-Operator Type: Provide wall-, hood-, or bracket-mounted, jackshaft-type door operator unit consisting of electric motor, enclosed gear-head-reduction drive, and chain and sprocket secondary drive.
 - 1. Through-wall-mounted motor operator.
- G. Electric Motors: Provide high-starting torque, reversible, continuous-duty, Class A insulated, electric motors complying with NEMA MG 1; with overload protection; sized to start, accelerate, and operate door in either direction from any position, at not less than 2/3 fps (0.2 m/s) and not more than 1 fps (0.3 m/s), without exceeding nameplate ratings or service factor.
 - 1. Type: Polyphase, medium-induction type.
 - 2. Service Factor: According to NEMA MG 1, unless otherwise indicated.
 - 3. Coordinate wiring requirements and electrical characteristics of motors with building electrical system.
 - 4. Provide open dripproof-type motor, and controller with NEMA ICS 6, Type 1 enclosure.

- 5. Provide totally enclosed, nonventilated or fan-cooled motor, fitted with plugged drain, and controller with NEMA ICS 6, Type 4 enclosure where indicated.
- H. Obstruction Detection Device: Provide each motorized door with indicated external automatic safety sensor capable of protecting full width of door opening. Activation of sensor immediately stops and reverses downward door travel.
 - 1. Photoelectric Sensor: Manufacturer's standard system designed to detect an obstruction in door opening without contact between door and obstruction.
 - a. Self-Monitoring Type: Designed to interface with door operator control circuit to detect damage to or disconnection of sensing device. When self-monitoring feature is activated, door closes only with sustained pressure on close button.
 - 2. Sensor Edge: Provide each motorized door with an automatic safety sensor edge, located within astragal or weather stripping mounted to bottom bar. Contact with sensor immediately stops and reverses downward door travel. Connect to control circuit using manufacturer's standard take-up reel or self-coiling cable.
 - a. Provide electrically actuated automatic bottom bar.
 - 1) Self-Monitoring Type: Four-wire configured device.
- I. Limit Switches: Provide adjustable switches, interlocked with motor controls and set to automatically stop door at fully opened and fully closed positions.
- J. Provide electric operators with ADA-compliant audible alarm and visual indicator lights.

2.6 MANUAL DOOR OPERATORS

- A. Provide manual operators for Counter Doors.
- B. Push-up Operation: Design counterbalance mechanism so required lift or pull for door operation does not exceed 25 lbf (111 N).

2.7 FINISHES, GENERAL

- A. General: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.8 STEEL AND GALVANIZED STEEL FINISHES

- A. Baked Finish: Manufacturer's standard baked finish consisting of primer and topcoat according to coating manufacturer's written instructions for cleaning, pretreatment, application, thermosetting, and minimum dry film thickness.
- B. Counter Door Finish: Counter Doors to have exposed galvanized steel finish.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install coiling doors and operating equipment complete with necessary hardware, jamb and head molding strips, anchors, inserts, hangers, and equipment supports.
 - 1. Install fire-rated doors to comply with NFPA 80.

3.2 ADJUSTING

A. Lubricate bearings and sliding parts; adjust doors to operate easily, free of warp, twist, or distortion and with weathertight fit around entire perimeter.


3.3 STARTUP SERVICES

- A. Engage a factory-authorized service representative to perform startup service.
 - 1. Complete installation and startup checks according to manufacturer's written instructions.
 - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
 - a. Test door closing when activated by detector or alarm-connected fire-release system. Reset door-closing mechanism after successful test.

3.4 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain overhead coiling doors. Refer to Division 1 Section "Closeout Procedures and Demonstration and Training."

END OF SECTION 08331

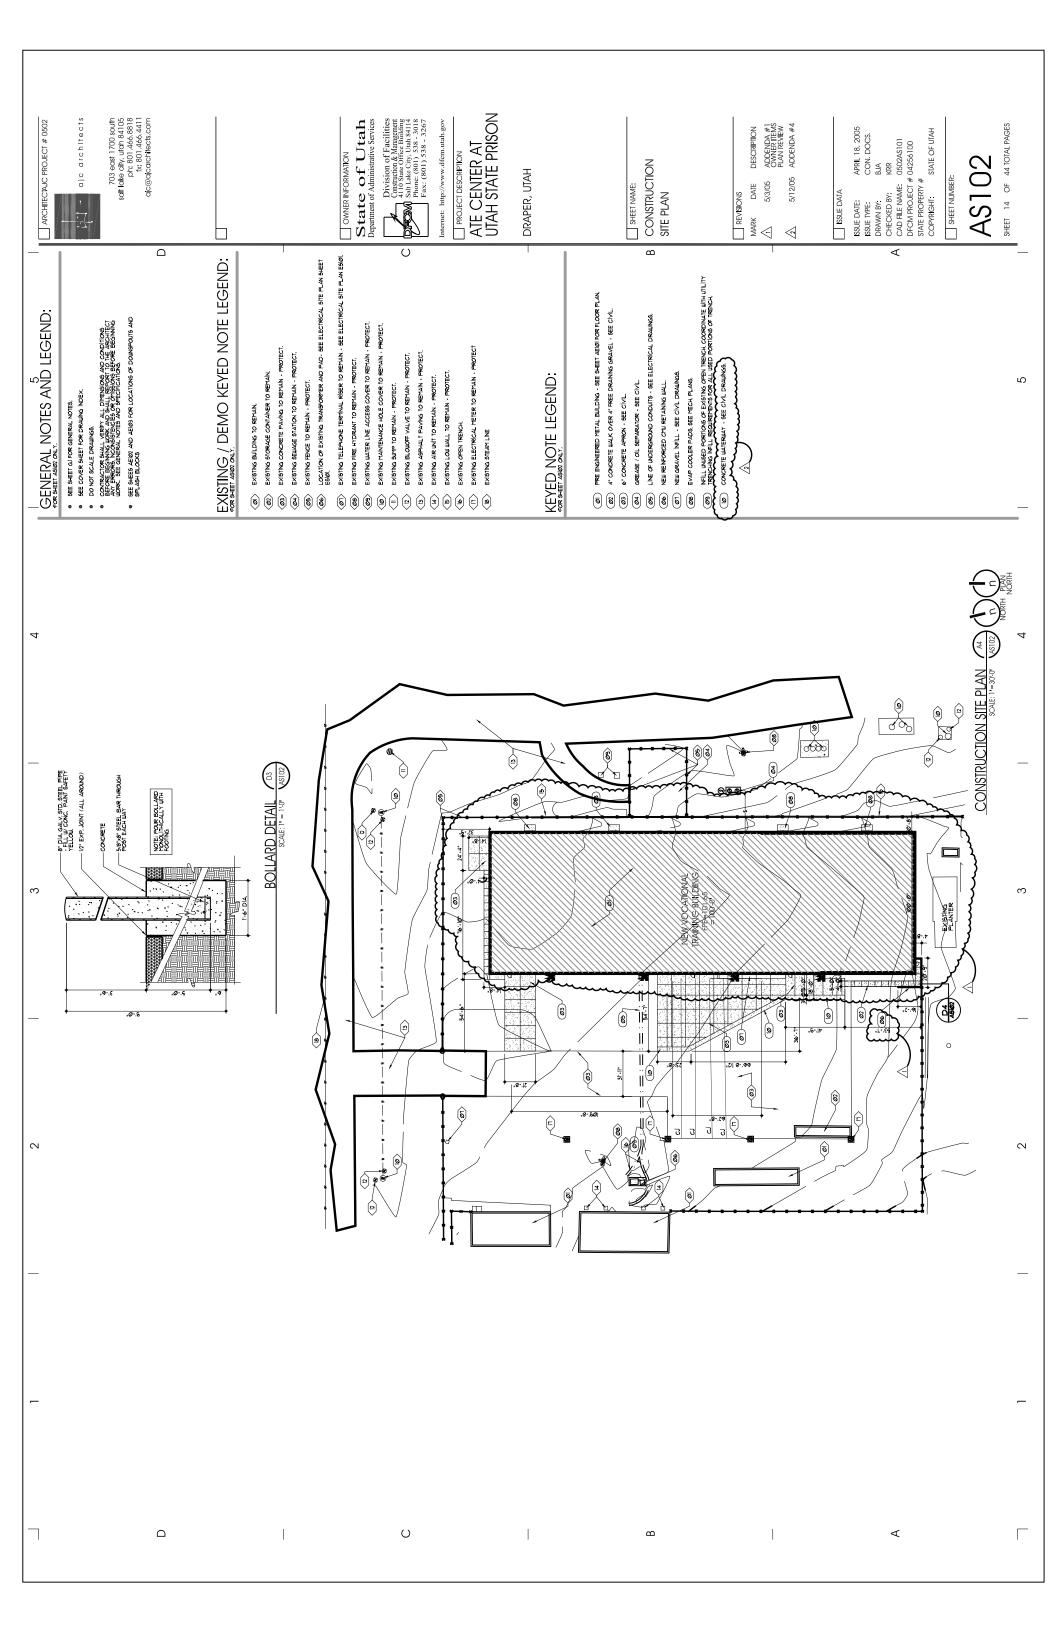

ADDENDUM

Project Name: ATE Center at Utah State Prison Addendum No.: 4

Date: May 12, 2005

From: WHW Engineering Inc

1354 East 3300 South Suite 200 Salt Lake City, Utah 84106

Phone (80) 466-4021 Fax (801) 466-8536

To: All Bidders

Description

This Addendum forms and becomes a part of the Contract Documents and modifies the original Bidding Documents dated March 2005 as noted below. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

This Addendum consists of 1 page.

I - CHANGES TO PRIOR ADDENDA: None

II - CHANGES TO BIDDING REQUIREMENTS: None

III - CHANGES TO AGREEMENT & OTHER CONTRACT FORMS: None

IV - CHANGES/CLARIFICATIONS TO CONDITIONS OF THE CONTRACT: None

V - CHANGES/CLARIFICATIONS TO SPECIFICATIONS: None

VI - CHANGES/CLARIFICATIONS TO DRAWINGS:

Item VI-1. Sheet ME101 sheet note 1: The buried high pressure steam main shall be 3" pipe, and the buried condensate main shall be 1-1/4" pipe.

PRIOR APPROVALS

THE FOLLOWING ITEMS, AS SUBMITTED, ARE CONSIDERED, IN GENERAL AND IN NAME ONLY, AS EQUAL TO THOSE ITEMS SPECIFIED. THIS REVIEW DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY OF CONFORMING TO THE DRAWINGS AND SPECIFICATIONS FOR DIMENSIONS TO BE CONFIRMED AND CORRELATED AT THE JOBSITE AND FOR REQUIREMENTS OF THE SPECIFICATIONS FOR COORDINATION WITH OTHER TRADES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING EXISTING CONDITIONS AND THE SUITABILITY OF "EQUAL" PRODUCTS FOR THE SPECIFIED APPLICATION.

Manufacturer

<u>Description</u>	<u> </u>
15185 - Condensate Pump	Skidmore
15101 – Strainers	IFC
15101 - Check valves	IFC, Conbraco
15101 – Vacuum Breaker	Barnes & Jones